

Panel & Ceiling Lights

Uniform, diffused illumination for workspaces

Energy-efficient with high luminaire efficacy

Available in standard and custom sizes

Ideal for open offices, meeting rooms, and collaborative spaces

LED Workspace Lighting

WORKWISE GLOW



Product Features

CCT : 3000K/4000K/5700K/6500K/Tuneable White

CRI : >80, >90

Beam Angle : Diffused / Low UGR

Surface Mounted/Recessed

High Quality CRCA

Highly Efficient SMD LED Chips

IP Protection : IP20, IK02

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%


While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

WORKWISE GLOW TECHNICAL DATA




Rated input voltage : 240V AC, 50Hz
 Operating input voltage : 100-300V AC, 50Hz
 Operating Temperature : -10°C to +45°C
 Power factor : >0.90
 A-THD : <10%
 Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature
 Inbuilt surge protection : CM - DM : 4kV

WORKWISE GLOW 2x1 - SURFACE

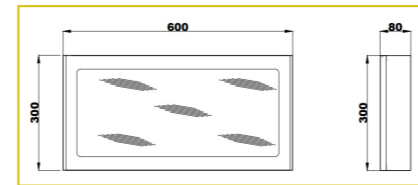


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 18W 2x1 WORKWISE GLOW	18W	80+	4000K	2160 LUMENS

WORKWISE GLOW 2x2 - SURFACE

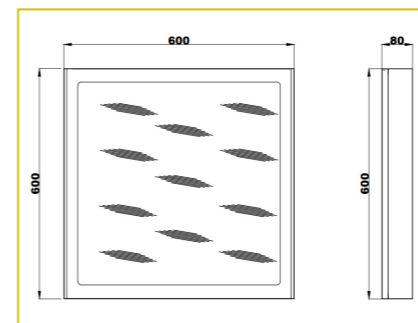


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 28W 2x2 WORKWISE GLOW	28W	80+	4000K	2160 LUMENS
TSDLCL 36W 2x2 WORKWISE GLOW	36W	80+	4000K	4320 LUMENS

WORKWISE 2x1 - RECESS GLOW

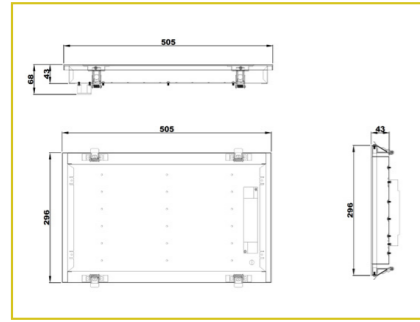


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 18W 2x1 WORKWISE GLOW	18W	80+	4000K	2160 LUMENS
TRDSLCL 20W 2x1 WORKWISE GLOW	20W	80+	4000K	2400 LUMENS

WORKWISE 4x1 - SURFACE GLOW

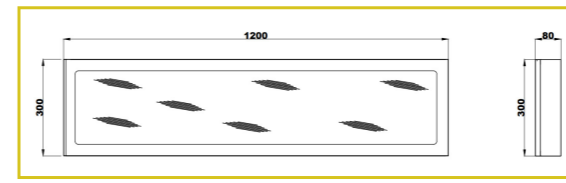


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 28W 4x1 WORKWISE GLOW	28W	80+	4000K	2160 LUMENS
TSDLCL 36W 4x1 WORKWISE GLOW	36W	80+	4000K	4320 LUMENS

WORKWISE 2x2 - RECESS GLOW

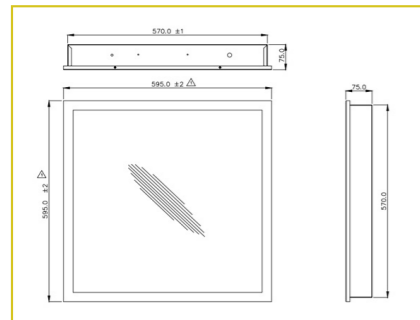

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 28W 2x2 WORKWISE GLOW	28W	80+	4000K	2160 LUMENS
TRDSLCL 36W 2x2 WORKWISE GLOW	36W	80+	4000K	4320 LUMENS
TRDSLCL 40W 2x2 WORKWISE GLOW	40W	80+	4000K	4800 LUMENS

WORKWISE 4x1 - Recess GLOW

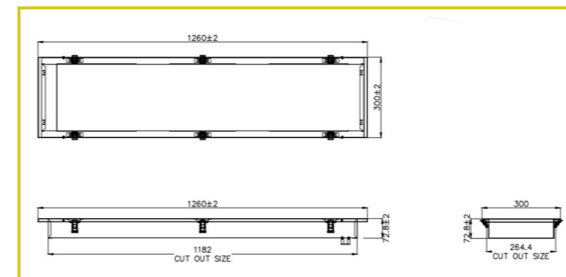

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 28W 4x1 WORKWISE GLOW	28W	80+	4000K	2160 LUMENS
TRDSLCL 36W 4x1 WORKWISE GLOW	36W	80+	4000K	4320 LUMENS
TRDSLCL 40W 4x1 WORKWISE GLOW	40W	80+	4000K	4800 LUMENS