

Linear Continuous Lighting

Seamless illumination for corridors, offices, and commercial layouts

Modular design for flexible lengths and layouts

High uniformity and glare-controlled optics

Suitable for suspended, recessed, or surface mounting

LED Workspace Lighting

WORKWISE LINE



Product Features

CCT : 3000K/4000K/5700K/6500K/Tuneable White

CRI : >80,>90

Beam Angle : Diffused, Low UGR, Narrow Beam, Up/Down

Surface Mounted/Recessed

Customized Lengths & Shapes Available

High Quality Aluminum Extrusion

Highly Efficient SMD LED Chips

IP Protection : IP20, IK02

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%

While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

WORKWISE TECHNICAL DATA

LINE



Rated input voltage : 240V AC, 50Hz

Operating input voltage : 100-300V AC, 50Hz

Operating Temperature : -10°C to +45°C

Power factor : >0.90


A-THD : <10%

Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature

Inbuilt surge protection : CM - DM : 4kV

WORKWISE LINEAR 2ft - SURFACE


LINE

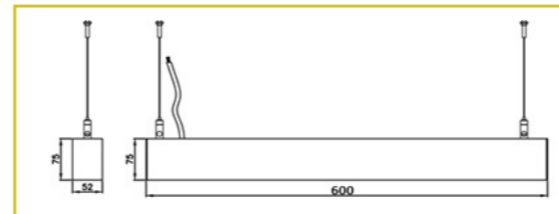

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 10W WORKWISE LINE 5070 2FT	10W	80+	4000K	1100 LUMENS
TSDLCL 12W WORKWISE LINE 5070 2FT	12W	80+	4000K	1320 LUMENS
TSDLCL 14W WORKWISE LINE 5070 2FT	14W	80+	4000K	1540 LUMENS




WORKWISE LINE 4ft - SURFACE

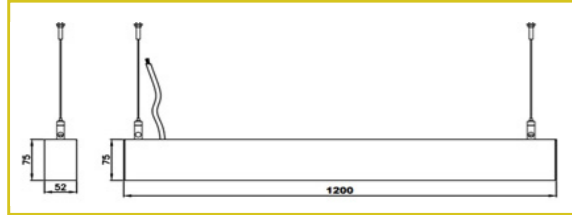

MODEL NO & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 18W WORKWISE LINE 5070 4FT	18W	80+	4000K	1980 LUMENS
TSDLCL 28W WORKWISE LINE 5070 4FT	28W	80+	4000K	3080 LUMENS
TSDLCL 36W WORKWISE LINE 5070 4FT	36W	80+	4000K	3960 LUMENS

WORKWISE LINE 8ft - SURFACE


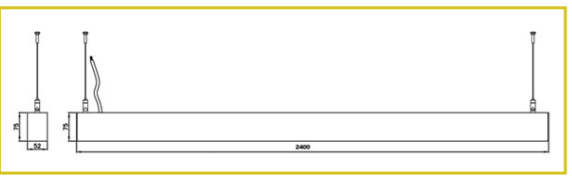


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 56W WORKWISE LINE 5070 8FT	56W	80+	4000K	6160 LUMENS
TSDLCL 72W WORKWISE LINE 5070 8FT	72W	80+	4000K	7920 LUMENS


WORKWISE LINEAR 2ft - RECESS

LINEAR 4ft - RECESS


LINEAR 8ft - RECESS

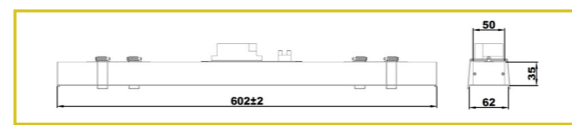

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 10W WORKWISE LINE 5070 2FT	10W	80+	4000K	1100 LUMENS
TRDSLCL 12W WORKWISE LINE 5070 2FT	12W	80+	4000K	1320 LUMENS
TRDSLCL 14W WORKWISE LINE 5070 2FT	14W	80+	4000K	1540 LUMENS

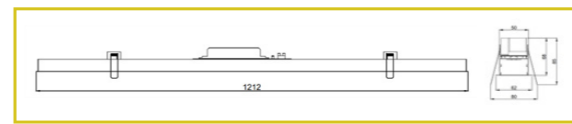

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 18W WORKWISE LINE 5070 4FT	18W	80+	4000K	1980 LUMENS
TRDSLCL 20W WORKWISE LINE 5070 4FT	20W	80+	4000K	2200 LUMENS
TRDSLCL 25W WORKWISE LINE 5070 4FT	25W	80+	4000K	2750 LUMENS
TRDSLCL 28W WORKWISE LINE 5070 4FT	28W	80+	4000K	3080 LUMENS
TRDSLCL 36W WORKWISE LINE 5070 4FT	36W	80+	4000K	3960 LUMENS
TRDSLCL 40W WORKWISE LINE 5070 4FT	40W	80+	4000K	4400 LUMENS

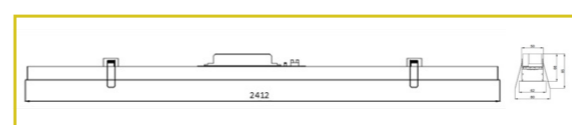

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TRDSLCL 40W WORKWISE LINE 8FT	40W	80+	4000K	4400 LUMENS
TRDSLCL 56W WORKWISE LINE 8FT	56W	80+	4000K	6160 LUMENS
TRDSLCL 72W WORKWISE LINE 8FT	72W	80+	4000K	7920 LUMENS
TRDSLCL 80W WORKWISE LINE 8FT	80W	80+	4000K	8800 LUMENS

Wattage tolerance = ±5%
While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.