

Circular Ring Luminaires

Modern ring-shaped design ideal for offices, meeting rooms, and collaborative spaces

Available in various diameters, wattages, and color temperatures

Sleek surface-mounted or suspended options for architectural appeal

High luminaire efficacy with uniform, glare-free illumination

LED Workspace Lighting

WORKWISE HALO



Product Features

- CCT : 3000K/4000K/5700K/6500K/Tuneable White
- CRI : >80,>90
- Beam Angle : Diffused,Low UGR
- Surface Mounted/Suspended
- Customized Diameters Available
- High Quality Aluminum
- Highly Efficient SMD LED Chips
- IP Protection : IP20, IK02
- External additional surge protection : Optional 10kV
- Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%


While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

WORKWISE TECHNICAL DATA HALO




Rated input voltage : 240V AC, 50Hz
 Operating input voltage : 100-300V AC, 50Hz
 Operating Temperature : -10°C to +45°C
 Power factor : >0.90
 A-THD : <10%
 Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature
 Inbuilt surge protection : CM - DM : 4kV

WORKWISE MOON HALO

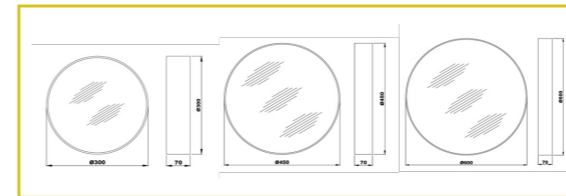

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 18W WORKWISE 300 HALO MOON	18W	80+	4000K	1800 LUMENS
TSDLCL 28W WORKWISE 450 HALO MOON	28W	80+	4000K	2800 LUMENS
TSDLCL 36W WORKWISE 600 HALO MOON	36W	80+	4000K	3600 LUMENS
TSDLCL 56W WORKWISE 750 HALO MOON	56W	80+	4000K	5600 LUMENS
TSDLCL 72W WORKWISE 900 HALO MOON	72W	80+	4000K	7200 LUMENS

WORKWISE DONUT HALO

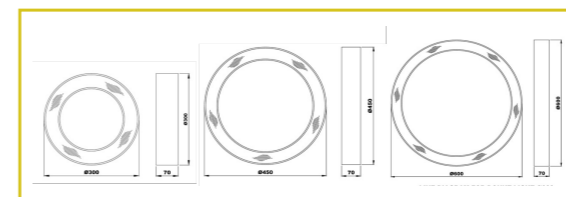

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS
TSDLCL 18W WORKWISE 300 HALO DONUT	18W	80+	4000K	1440 LUMENS
TSDLCL 28W WORKWISE 450 HALO DONUT	28W	80+	4000K	2240 LUMENS
TSDLCL 36W WORKWISE 600 HALO DONUT	36W	80+	4000K	2880 LUMENS
TSDLCL 56W WORKWISE 750 HALO DONUT	56W	80+	4000K	4480 LUMENS
TSDLCL 72W WORKWISE 900 HALO DONUT	72W	80+	4000K	5760 LUMENS