

Versatile Industrial Highbay

Button-lens design delivers glare free light distribution options

High luminaire efficacy for superior energy efficiency

Engineered for demanding industrial and commercial applications

Wide wattage range from 80W to 200W for flexible use

LED Highbays BAYRUNNER



Product Features

Efficacy 120 Lumens/Watt

Microwave Sensor Option(Non-Integral)

CCT : 5700K

CRI : >70

Beam Angle : 90°

Button Lens

High Quality Aluminium Die Cast

Highly Efficient SMD LED chips

IP Protection : IP66, IK08

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%

While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

BAYRUNNER TECHNICAL DATA



Rated input voltage : 240V AC, 50Hz

Operating input voltage : 100-300V AC, 50Hz

Operating Temperature : -10°C to +45°C


Power factor : >0.90

A-THD : <10%

Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature


Inbuilt surge protection : CM - DM : 4kV/6kV

BAYRUNNER 80W - 100W

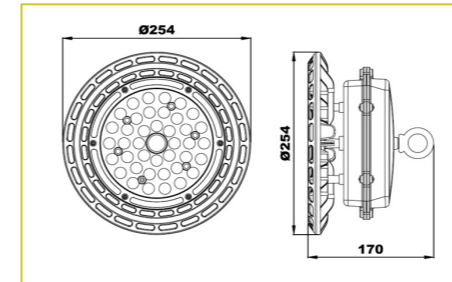

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TFTHL 80W BAYRUNNER	80W	70+	5700K	9600 LUMENS	OPTIONAL : EXTERNAL
TFTHL 100W BAYRUNNER	100W	70+	5700K	12000 LUMENS	OPTIONAL : EXTERNAL

BAYRUNNER 120W - 150W

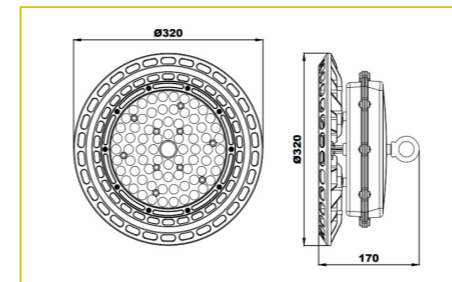

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TFTHL 120W BAYRUNNER	120W	70+	5700K	14400 LUMENS	OPTIONAL : EXTERNAL
TFTHL 150W BAYRUNNER	150W	70+	5700K	18000 LUMENS	OPTIONAL : EXTERNAL