

Stadium & Sports Floodlight

High-power floodlight designed for professional stadium and sports lighting

Specialized optics ensure uniform illumination and superior glare control

Wattage range extends beyond standard FieldPro for large-scale arenas

Rugged IP66 and IK08 construction guarantees reliable performance in demanding outdoor conditions

LED Floodlights FIELDPRO MAX



Product Features

Efficacy 130 Lumens/Watt

CCT : 5700K

CRI : >70

Beam Angle : 15°/ 30°/60°/90°/Sports Lens

Stadium Lighting

High Quality Aluminium Die Cast

Highly Efficient SMD LED chips

IP Protection : IP66, IK08

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%


While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THNK** for the latest updates.

FIELDPRO MAX TECHNICAL DATA



Rated input voltage : 240V AC, 50Hz
 Operating input voltage : 100-300V AC, 50Hz
 Operating Temperature : -10°C to +45°C
 Power factor : >0.90
 A-THD : <10%
 Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature
 Inbuilt surge protection : CM - DM : 4kV/6kV

FIELDPRO MAX 500W - 1000W

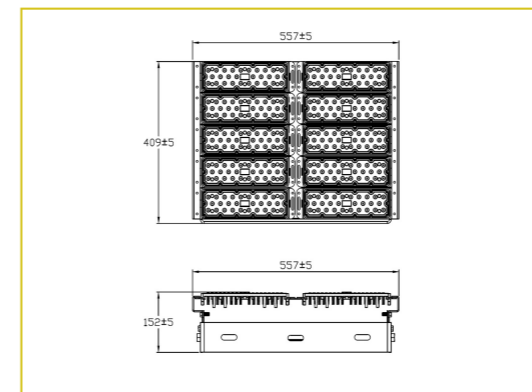

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TFTHL 500W FIELDPRO MAX	500W	70+	5700K	65000 LUMENS	INBUILT 10KV
TFTHL 500W X2 FIELDPRO MAX	1000W	70+	5700K	130000 LUMENS	INBUILT 10KV