

**Semi-Professional Streetlight**

Balanced design combining economy with professional performance

Multiple optical distributions for urban and semi-urban roads

Robust housing with IP66 and IK08 protection

Wattage range supports both secondary streets and main roads

# LED Streetlights ROADRUNNER



**Product Features**

Efficacy 120 Lumens/Watt

CCT : 5700K

CRI : >70

Beam Angle : Type II Batwing

Direct Lens Model

High Quality Aluminium Die Cast

Highly Efficient SMD LED chips

IP Protection : IP65, IK08

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%


While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THNK** for the latest updates.

# ROADRUNNER TECHNICAL DATA




Rated input voltage : 240V AC, 50Hz  
 Operating input voltage : 100-300V AC, 50Hz  
 Operating Temperature : -10°C to +45°C  
 Power factor : >0.90  
 A-THD : <10%  
 Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature  
 Inbuilt surge protection : CM - DM : 4kV/6kV

## ROADRUNNER 18W - 30W

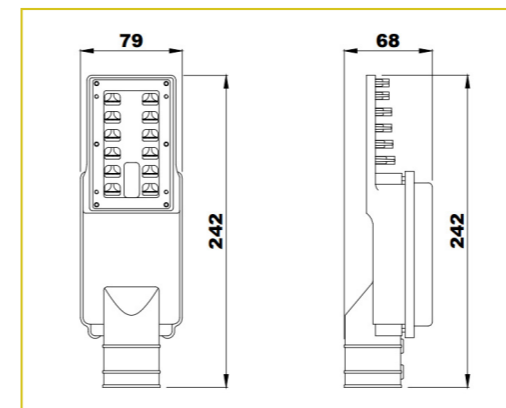


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TSL 18W ROADRUNNER	18W	70+	5700K	2160 LUMENS	OPTIONAL : EXTERNAL
TSL 20W ROADRUNNER	20W	70+	5700K	2400 LUMENS	OPTIONAL : EXTERNAL
TSL 25W ROADRUNNER	25W	70+	5700K	3000 LUMENS	OPTIONAL : EXTERNAL
TSL 30W ROADRUNNER	30W	70+	5700K	3600 LUMENS	OPTIONAL : EXTERNAL

# ROADRUNNER 35W - 45W

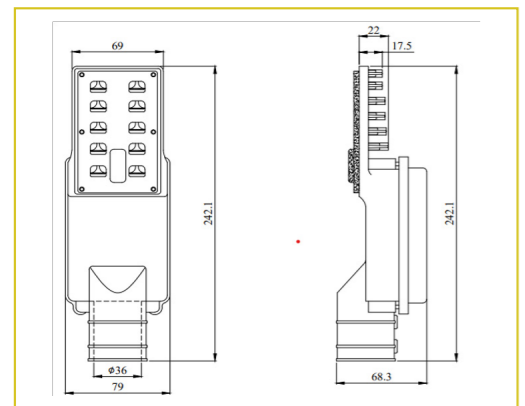


MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TSL 35W ROADRUNNER	35W	70+	5700K	4200 LUMENS	OPTIONAL : EXTERNAL
TSL 45W ROADRUNNER	45W	70+	5700K	5400 LUMENS	OPTIONAL : EXTERNAL

# ROADRUNNER 60W - 75W

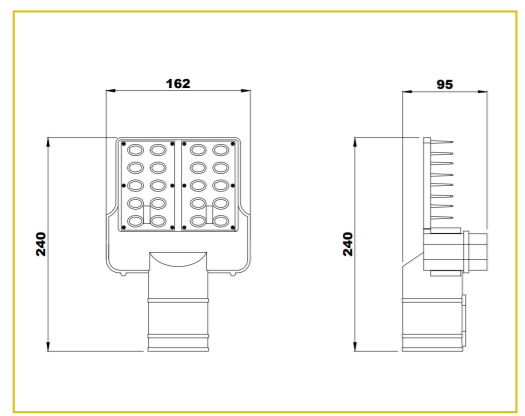

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TSL 60W ROADRUNNER	60W	70+	5700K	4200 LUMENS	INTERNAL
TSL 75W ROADRUNNER	75W	70+	5700K	5400 LUMENS	INTERNAL

# ROADRUNNER 90W - 120W

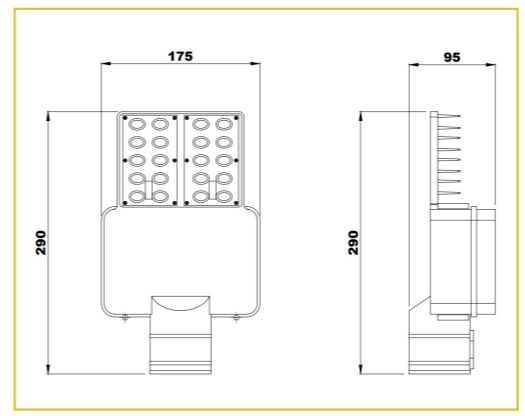

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TSL 90W ROADRUNNER	90W	70+	5700K	10800 LUMENS	INTERNAL
TSL 100W ROADRUNNER	100W	70+	5700K	12000 LUMENS	INTERNAL
TSL 120W ROADRUNNER	120W	70+	5700K	14400 LUMENS	INTERNAL

Wattage tolerance = ±5%  
While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THNK** for the latest updates.