

General-Purpose Industrial Luminaire

One design, many uses—ideal for general-purpose industrial lighting

Flexible mounting: bracket or hook

Milky or clear diffuser options for the desired visual effect

Available in 30W to 80W range with compact, robust build for dependable daily operation

LED Well Glass POWERLITE



Product Features

Efficacy 130 Lumens/Watt

CCT : 5700K

CRI : >70

Beam Angle : 120° - Diffused

High Quality Aluminium Die Cast

Highly Efficient SMD LED chips

IP Protection : IP66, IK08

External additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%

While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

POWERLITE TECHNICAL DATA



Rated input voltage : 240V AC, 50Hz

Operating input voltage : 100-300V AC, 50Hz

Operating Temperature : -10°C to +45°C


Power factor : >0.90

A-THD : <10%

Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature

Inbuilt surge protection : CM - DM : 4kV/6kV

POWERLITE 20W - 80W

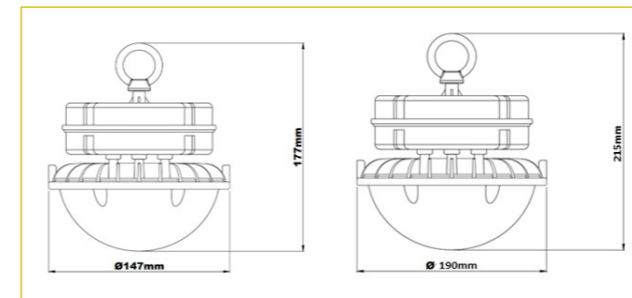

MODEL NO. & DESCRIPTION	WATTAGE	CRI	CCT	TOTAL LUMENS	SPD
TFTHL 20W POWERLITE	20W	70+	5700K	2600 LUMENS	OPTIONAL : EXTERNAL
TFTHL 30W POWERLITE	30W	70+	5700K	3900 LUMENS	OPTIONAL : EXTERNAL
TFTHL 50W POWERLITE	50W	70+	5700K	6500 LUMENS	OPTIONAL : EXTERNAL
TFTHL 80W POWERLITE	80W	70+	5700K	10400 LUMENS	OPTIONAL : EXTERNAL