


Premium anodised finish delivering a refined, elegant appearance  
 Soft downward illumination that gently lights pathways and floor-level zones  
 Ideal as a subtle night light for bedrooms, hotel rooms, and quiet environments  
 Combines safety, comfort, and aesthetics in one minimal, high-quality design

# LED Wall Lights LUME

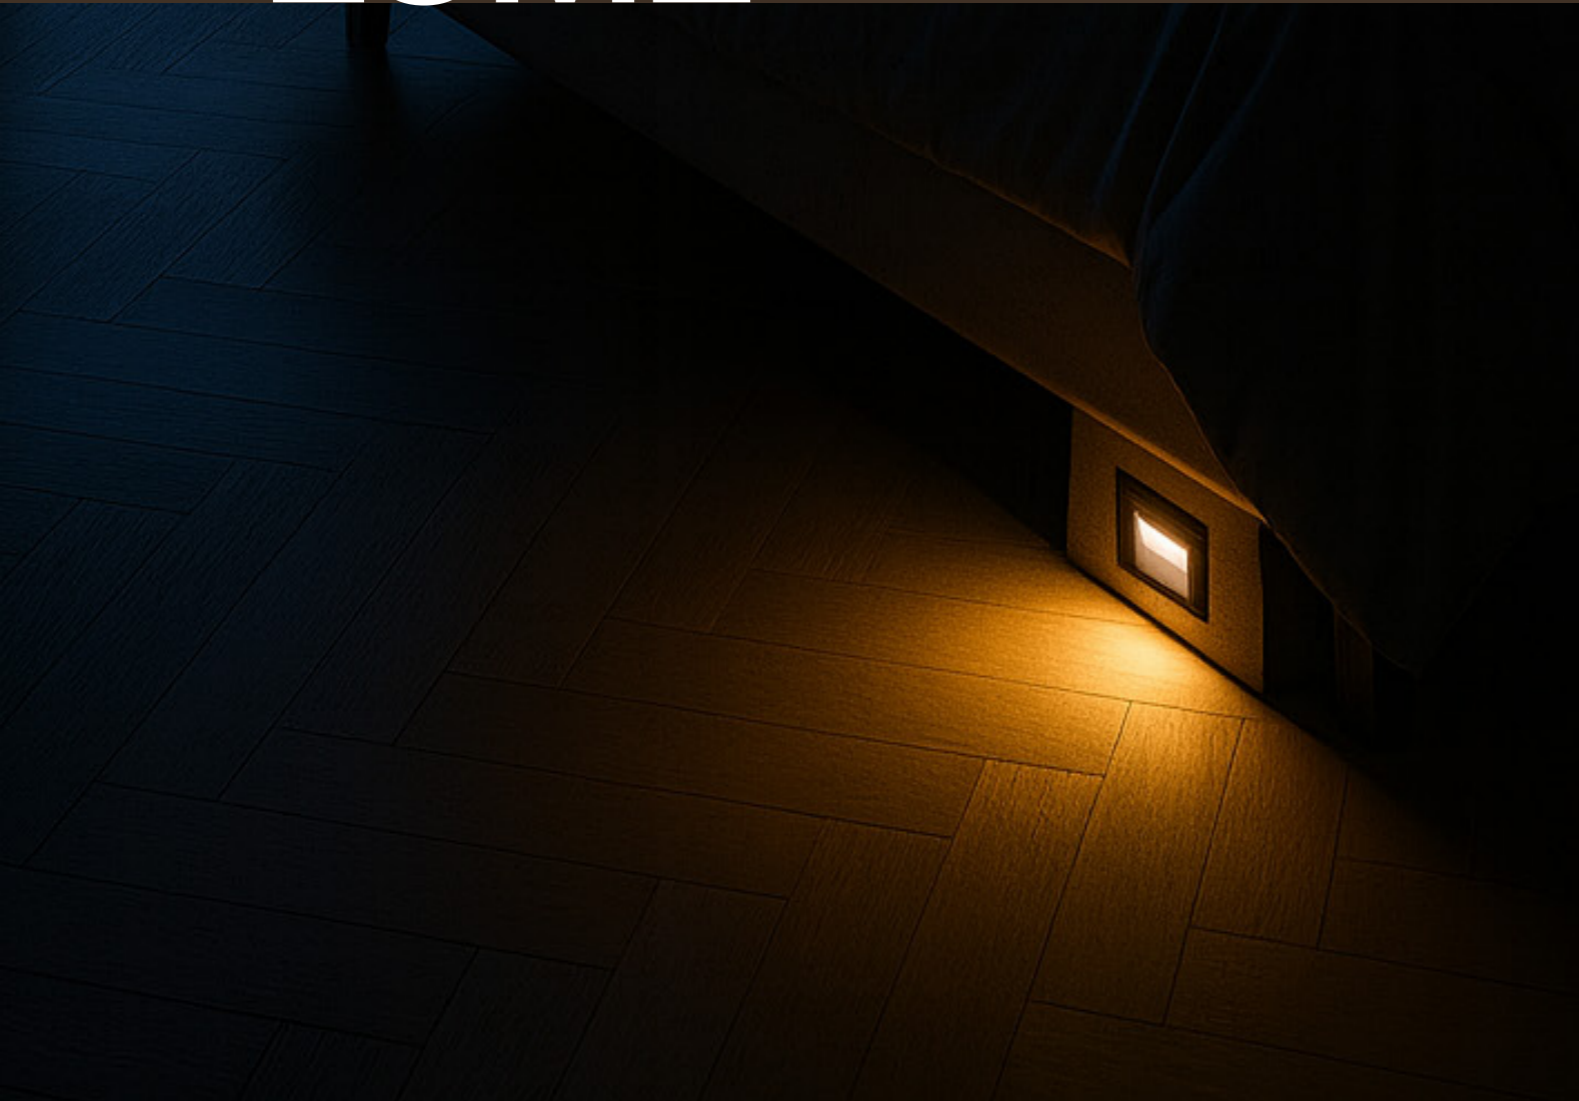

### Product Features

CCT : 3000K  
 CRI : >90  
 Beam angle : Asymmetric downward distribution  
 Body colour : Anodized  
 Material : Aluminium Die Casting  
 Mounting : Wall-Mounted - Recess  
 IP Protection : IP65  
 External additional surge protection : Optional 10kV  
 Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%  
 While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

## LUME TECHNICAL DATA



Rated input voltage : 240V AC, 50Hz  
 Operating input voltage : 100-300V AC, 50Hz  
 Operating Temperature : -10°C to +45°C  
 Power factor : >0.90  
 A-THD : <10%  
 Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature  
 Inbuilt surge protection : CM - DM : 4kV

## LUME 3W



MODEL NO. & DESCRIPTION	WATTAGE	LENGTH x WIDTH	CRI	CCT	SPD	DRIVER
TSL 3W LUME	6Wx2	90x80MM	90	3000K	OPTIONAL - EXTERNAL	INTERNAL