

A decorative ambient wall light

Soft white light diffused through an egg-shaped frosted glass for a warm, gentle glow.

Creates a calm, ambient atmosphere with comfortable, glare-free illumination.

Ideal for bedrooms, living spaces, corridors, and hospitality interiors.

# LED Wall Lights PEARL



## Product Features

CCT : 2700K/3000K/3500K/4000K/5000K/6500K

CRI : >80/>90/>95

Beam angle : Diffused

Body colour : White/Custom

Material : Aluminium Die Casting Housing and Glass Diffuser

Mounting : Wall-Mounted

IP Protection : IP20

Additional surge protection : Optional 10kV

Rated life (LM 80) : 50,000 hrs

Wattage tolerance = ±5%

While this catalogue serves as a general guide, specifications and availability may change. Please verify with **THINK** for the latest updates.

## PEARL TECHNICAL DATA



Rated input voltage : 240V AC, 50Hz

Operating input voltage : 100-300V AC, 50Hz

Operating Temperature : -10°C to +45°C


Power factor : >0.90

A-THD : <10%

Driver type : Non Dim, Isolated, Service Life 30,000 Hours at max. temperature

Inbuilt surge protection : CM - DM : 2kV

## PEARL 3W - 6W

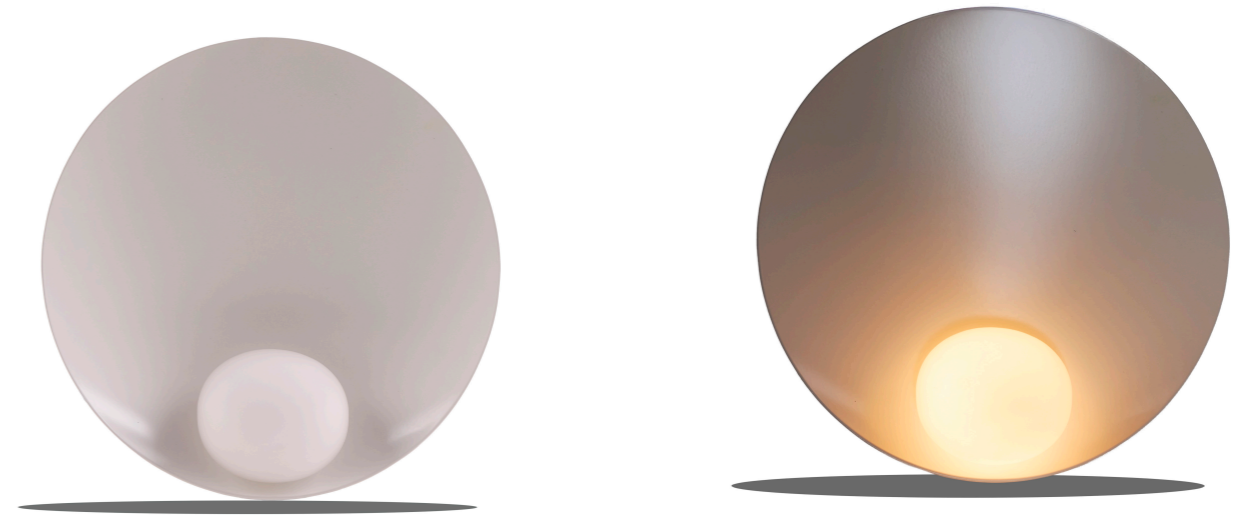

MODEL NO. & DESCRIPTION	WATTAGE	DIAMETER x WIDTH	CRI	CCT	TOTAL LUMENS	DRIVER
TSDLCL 3W PEARL	3W	260x110 MM	90	3000K	210 - 300 LUMENS	INTERNAL
TSDLCL 6W PEARL	6W	260x110 MM	90	3000K	420 - 600 LUMENS	INTERNAL